


MIM 4605 Case Hardened

Material Properties	Kinetics
	Typical ²
Ultimate Strength (KSI)	-
Yield Strength (KSI)	-
Elongation (% in 1")	-
Reduction in Area (%)	-
Surface Finish (Ra)	40
Impact Energy (ft-lbf) ¹	-
Macro Hardness (R15N)	88.3
Sintered Density (g/cm ³)	7.6

¹Test method uses ½ sized un-notched charpy bar.

² Typical values at a hardness of 47 HRC. Higher hardness and strength characteristics can routinely be obtained through varying Quench & Temper conditions

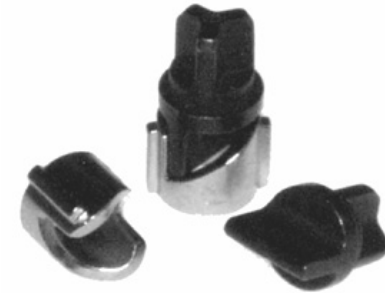

Material Description

Low alloy steel containing carbon, nickel, molybdenum. A multi-purpose, economical material that offers various strength, hardness and wear resistance properties depending if it is heat treated and the heat treat process used. Can be plated or coated for corrosion resistance. Used by a very wide range of industries including automotive, consumer product, firearms, power hand tools, structural and applications where good strength, hardness and wear resistance is required.

Material Composition

Fe	Ni	Mo	C	Si (Max)
Balance	1.5-2.5	0.2-0.5	0.4-0.6	1.0

Updated on 1/17/2008

This information is subject to change with internal research and development